
TENNESSEE DEPARTMENT OF ENVIRONMENT & CONSERVATION

FILE NO. - 7.43

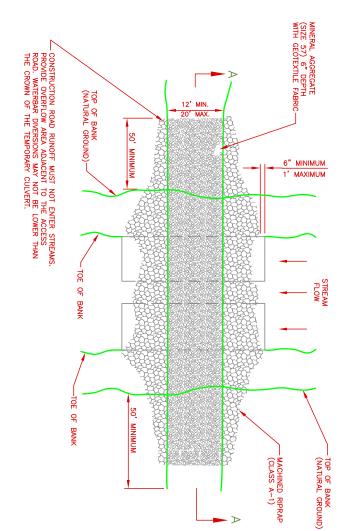


PLAN VIEW OF TEMPORARY CULVERT CROSSING

CONSTRUCTION ROAD RUNOFF MUST NOT ENTER STREAMS. PROVIDE OVERFLOW AREA ADJACENT TO THE ACCESS ROAD. WATERBARE DIVERSIONS MAY NOT BE LOWER THAN THE CROWN OF THE TEMPORARY CULVERT.

GEOTEXTILE FABRIC SHALL
BE PLACED UNDER ENTIRE
WIDTH OF MINERAL
AGGREGATE (SIZE 57)





C=1/2 Diameter of PIPE or 18" whichever is greater N=1/2 diameter of PIPE or 12" whichever is greater D = PIPE DIAMETER

SECTION A-A

GEOTEXTILE FABRIC
SHALL BE PLACED ON THE
STREAM BED AND BANKS
PRIOR TO PLACEMENT OF
CULVERTS AND AGGREGATE

.MACHINED RIPRAP (CLASS A-1)

CROWN OF FILL SHOULD BE ABOVE CHANNEL BANKS



REV	_	ı	ı	-	TYPE
	ı	ı	ı	ı	YEAR
	-	1	1	-	PROJECT NO.
	ı	ī	ī	ī	NO.

TEMPORARY STREAM CROSSING

NOT TO SCALE